
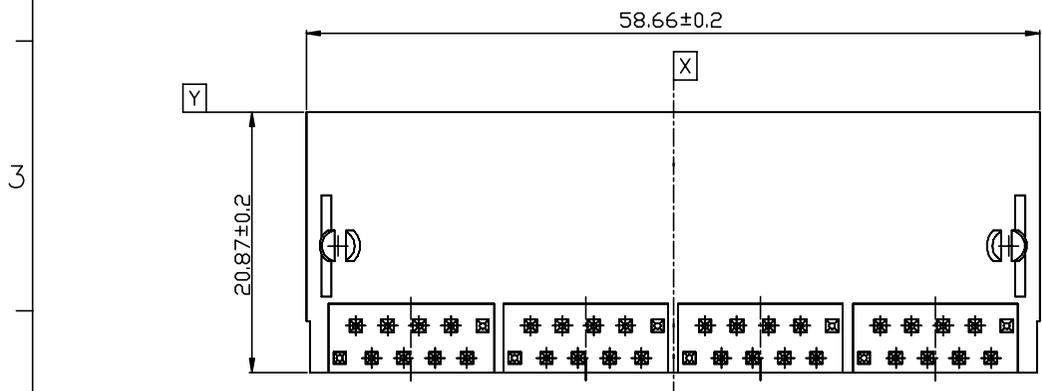
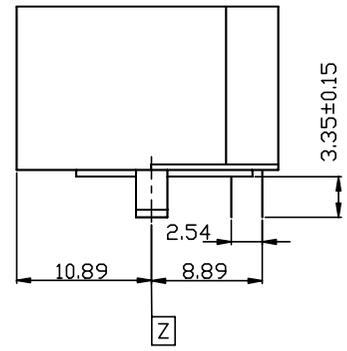


THESE DRAWINGS AND SPECIFICATIONS ARE THE SOLE PROPERTY OF ADVANCED CONNECTION TECHNOLOGY INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ADVANCED CONNECTION TECHNOLOGY INC. OR ITS AFFILIATED SUBSIDIARIES.

CAD FILE: XS00881-08a

REV.	DESCRIPTION	DWG		APPROVED	
		NAME	DATE	NAME	DATE
X01	PROTOTYPE	Melo	02/12/2009	Knight	02/12/2009

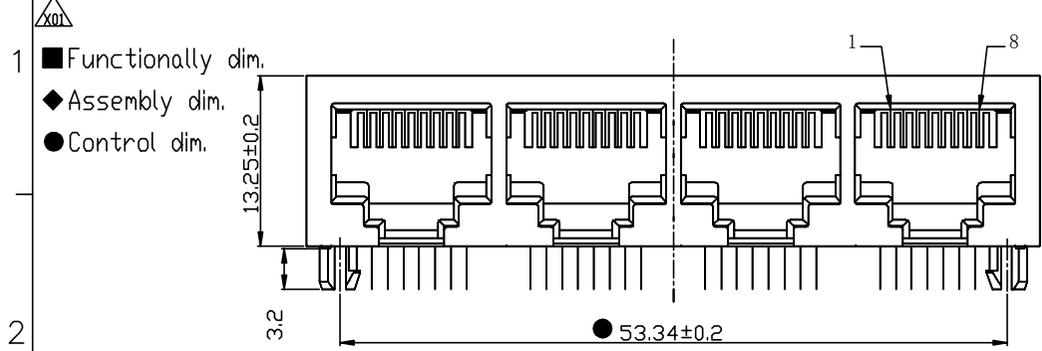

NOTE:

MATERIAL

- 1.HOUSING:GLASS FILLED POLYESTER UL94V-0
- 2.CONTACT:PHOSPHOR BRONZE $\phi 0.46\text{MM}$
- 3.PLATING:GOLD PLATING OVER NICKEL

ELECTRIC


- 1.VOLTAGE RATING:125 VAC RMS
- 2.CURRENT RATING:15 AMP
- 3.CONTACT RESISTANCE:30 MILLIOHMS MAX.
- 4.INSULATION RESISTANCE:500 MEGOHMS MIN. 500VDC
- 5.DIELECTRIC WITHSTANDING RESISTANCE:
1000VAC RMS 50HZ. 1MIN.

MECHANICAL

- 1.DURRABILITY:750 CYCLES MIN.
- 2.PCB RETENTION PRE-SOLDER:1LB MIN.

ENVIRONMENTAL

- 1.STORAGE:-40°~+85°
- 2.OPERATION:0°~+70°

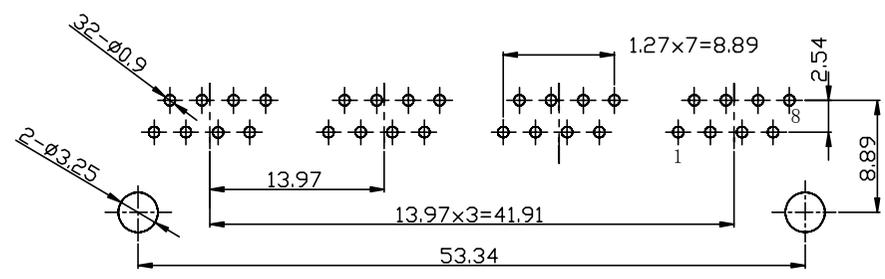

PCB BOARD LAYOUT

Approval Signature

INTENDED USE: +INARR		Advanced Connection Technology TAIWAN TEL: 886-2-88091080			
GENERAL DIMENSION		TITLE: RJ45 JACK 8P8C WITH 4 SERIES		DRAWN: Melo 02/12/2009	
.X±0.15	.XX±0.075	DWG NO: 325-00881-08 X01		CHECKED: Melo 02/12/2009	
.XXX±0.05		REV.:		APPROVED: Knight 02/12/2009	
UNIT: mm		SCALE: NONE		SHEET 1 OF 1	
				NAME DATE	